

USB EXTENDER User Manual

Special Notification

- ※ Before using this product, please read this manual carefully.
- ※ Please keep this manual for future reference.
- ※ The company may change the function of product without notice.

Summary


This item is made by two single unit, Sender and Receiver, transmission by CAT5E/CAT6 UTP cable (same line orders with ethernet). No need extra install software. The max distance between Sender and Receiver can reach 60 meters when using CAT6 UTP cable. It is a ideal product in extend keyboard, mouse, writing pad and game controller, etc. USB devices.

Features

- One CAT5E/6 cable can instead of USB cable to transmit long distance.
- Using CAT6 cable support USB2.0 device transmit up to 60 meters.
- Using CAT6 cable can make the low-speed devices transmit keyboard, mouse etc. device extend up to 100 meters.
- Compliant with USB 2.0 USB 1.1.
- Supports major operating systems: Windows, Mac OS X, Linux etc.
- Supports full-speed(480Mbps)and low speed (1.5Mbps) USB device.
- Plug and Play, no driver installation needed.
- Support swap function, plug and play.
- Simple installation.


(To prevail in kind)

Introduction of the front and rear panels

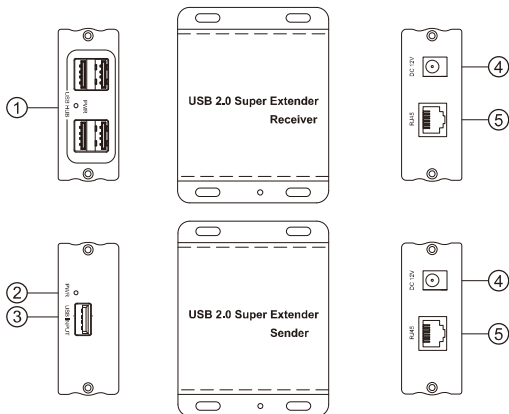

- ① **USB OUT**-----4xUSB Signal output interface;Used to connect the keyboard, the mouse, the handwriting board, and the gamecontroller, etc. USB equipment;
- ② **PWR**-----Power indicator light;
- ③ **USB IN**-----1xUSB Signal input interface;Connect the computer and DVR;
- ④ **DC 12V** -----Power interface; Support DC 12V/2A input;
- ⑤ **RJ45**-----Network interface; Connect CAT5E/CAT6 cable.

System connection diagram

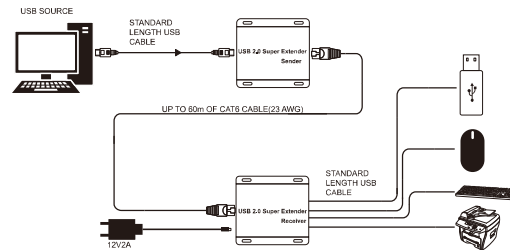

Specifications

- USB input interface-----1x USB-A/F
- USB output interface-----4x USB-A/F
- Compatible USB version-----USB1.1 and USB 2.0
- Wiring method-----IEEE-568B
- Maximum working current-----≤60m CAT6 standard cable
- Input cable distance-----≤5m USB standard cable
- Output cable distance -----≤5m USB standard cable
- Supports data transfer rates -----480Mbps
- Power Adapter Specifications--AC(50/60HZ) :100V-240V, DC Output:12V/2A
- Operating temperature range-----0~40°C
- Operating humidity range-----5~85% RH (non-condensing)
- Sender Dimension(L×W×H)-----75×97×29mm
- Receiver Weight-----120g
- Sender Dimension(L×W×H)-----75×97×29mm
- Receiver Weight-----130g

Packing List

No.	Name	Qty	Remark
1	USB extender host(TX&RX)	1set	
2	Power adapter	1ps	

The matters needing attention of installation

In order to ensure the reliable performance of the equipment and the safety of the user, please observe the following matters during the process of installation, use and maintenance.

- Please do not use this product in the following places: the place of dust, soot and electric conductivity dust, corrosive gas, combustible gas; the place exposed to high temperature, condensation, wind and rain; the occasion of vibration and impact. Electric shock, fire, wrong operation can lead to damage and deterioration to the product, either;
- Should avoid wiring and inserting cable plug in charged state, otherwise it is easy to cause the shock, or electrical damage;
- The installation and wiring should be strong and reliable, contact undesirable may lead to false action;
- This product grounds by the grounding wires. To avoid electric shocks, grounding wires and the earth must be linked together. Before the connection of input or output terminal, please make sure this product is correctly grounded;
- Only after cutting down all external power source, can install, wiring operation begin, or it may cause electric shock or equipment damage;
- Please do not dismantle the equipment, avoid damaging the internal electrical component.