

Angekis[®]

Cleartalk Anchor

Model:ASP-06

Manual




www.angekis.com

Overview

The **Clartalk Anchor** is the high-quality conference call device connected with computers and other intelligent devices. It is provided with the latest generation of voice processing algorithm of acoustic echo cancellation and environmental noise reduction. Its voice quality of the call is clear and natural. Its body is light and the device and cable are integrated, which is easy to carry, install and operate. It is suitable for computer conference call and other application scenarios.

About the device

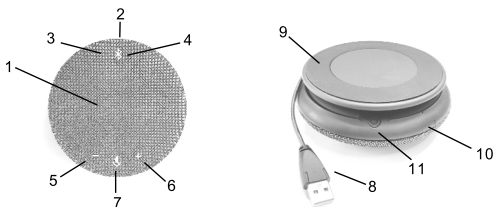

- (1) Speaker (2) Microphone (3) Bluetooth status indicator (4) Bluetooth key
(5) Volume decrease key (6) Volume increase key (7) Microphone mute key
(8) USB interface of integrated device and cable (9) Anti-slip foot pad
(10) Three sets of status indicators (11) Power ON/OFF key

Note: (3), (4) and (11) are only available for Bluetooth version.

Packing list



Host




Manual

Device connection

1. Connect USB data cable of the host:

Insert the USB cable of the host into the USB interface of computer, and the driver will be installed automatically. After installation, the computer screen will prompt that it is ready or the device can be used. At this time, the host green indicator is always ON, indicating that it has been connected.



2. Bluetooth wireless connection of the host (only applicable to Bluetooth version):

Press the "Power ON/OFF" key of the host. When power on for the first time, the Bluetooth indicator will flash continuously to wait for connection, and turn to slow flash after connecting with the computer intelligent device. If the Bluetooth indicator goes out and enters the sleep state, press the Bluetooth key to wake up, and long pressing the Bluetooth key can clear the current Bluetooth connection.

Note: the computer intelligent device needs to have Bluetooth function or Bluetooth adapter.



How to operate

1. Application of wired connection of USB interface:

- 1.1 After the wired connection of USB of the host is successful, the instant messaging or application software (such as Microsoft Teams, Zoom, etc.) in the computer can be used. The conference can be carried out according to the operation method of the application software.
- 1.2 Speaker volume adjustment: during a call, press the "Volume decrease" key of the host to gradually decrease the speaker volume to the minimum (Continuous flashing green light means mute speaker); and press the "Volume increase" key to gradually increase the speaker volume to the maximum.
- 1.3 Microphone pickup and mute: during a call, the microphone is in the pickup state by default. When press the "Microphone mute" key of the host, the status indicator will be red, indicating that the microphone is mute. Press this key again to turn off the red, indicating that the microphone pickup is restored.

How to operate

2. Application of Bluetooth wireless connection (only applicable to Bluetooth version):

- 2.1 After the Bluetooth wireless connection of the host is successful, the instant messaging or Internet phone application software (such as Microsoft Teams, Zoom, etc.) in the computer can be used. The Internet phone conference can be carried out according to the operation method of the application software.
- 2.2 When the host is connected with the mobile phone through Bluetooth, in addition to the normal calling, answering or ending of call with the mobile phone, it can also short press the "Power ON/OFF" key of the host to answer the incoming call or long press the "Power ON/OFF" key of the host to end a call.
- 2.3 Speaker volume adjustment: during a call, press the "Volume decrease" key of the host to gradually decrease the speaker volume to the minimum (Continuous flashing green light means mute speaker); and press the Volume increase key to gradually increase the speaker volume to the maximum.
- 2.4 Microphone pickup and mute: during a call, the microphone is in the pickup state by default. When press the "Microphone mute" key of the host, the status indicator will be red, indicating that the microphone is mute. Press this key again to turn off the red, indicating that the microphone pickup is restored.
- 2.5 When the status indicator flashes in orange, it will keep reminding you that the built-in battery is low. Please plug it into the USB power port for charging.
- 2.6 When charging, the indicator will be red, and when the built-in battery is fully charged, the red will go out.
- 2.7 Bluetooth connection is preferred when both of USB wired connection and Bluetooth wireless connection are available.

Points for attention

1. You can't connect multiple microphone speakers to the computer intelligent device at the same time, including the native device, or else, a squeak may appear during the call.
2. It is required to connect the USB cable directly to the USB interface of the computer device. It may cause operation problems if it is connected through the USB hub.
3. Check whether the device driver is installed and connected successfully: check whether the default device displays "native device model" in the options of playback (output) and recording (input) of the sound and audio device properties of the computer control panel option, if not, re-select "Native device model" and confirm.
4. When use, it can adjust the volume through the speaker option on the computer if necessary. When using instant messaging or application software, please set the device of the model as the preferred audio device.
5. Do not repair the device by yourself, or else, it may cause electric shock. Please contact your seller if there is any problem needing repair.
